FEEL SOUL

A bold bouclé with striking color combinations and dramatic contrasts, bringing rich texture and personality to interiors.



PANTONE©
15-4502

PANTONE©
12-0000







www.franinehc.com



Article specification:

Roll length:	~35 m	Width:	145 cm +	- 2 cm
Usable width:	140 cm +	- 2 cm	Weight m DIN EN 12127:	819 g +	- 5 %
Thickness:	1.8 mm +	- 2 %	Weight m² DIN EN 12127:	585 g +	- 5 %

Composition:

Surface EU 1007|2011:	100% Polyester
Base EU 1007|2011:	

Product profile for upholstery fabrics in living areas | according to DIN EN 14465:2006

			category
	Abrasion test (cycles) EN ISO 12947-1,2	>50.000 (Martindale	A
	Pilling test EN ISO 12945-2 (2.000 T)	4	A
	Tensile strength EN ISO 13934-1 warp: weft:	 1139 N 1287 N	 A A
	Tear growth resistance EN ISO 13937-3 warp: weft:	 383 N 351 N	 A A
	Resistance seam slippage EN ISO 13936-2 warp: weft:	 4.0 mm 3.5 mm	 A A
	Fastness to rubbing dry EN ISO 105-X12 bright colors dark colors	 4-5 4-5	 A A
	Fastness to rubbing wet EN ISO 105-X12 bright colors: dark colors:	 4-5 4-5	 A A
	Fastness to light EN ISO 105-B02-2 bright colors: dark colors:	 6 6	 A A
	Permissible color tolarance DIN EN 20105-A02	min. grade 4	passed

Typical product characteristics:

Light colors show staining and denim abrasion faster and more clearly than dark colors. In combination with dark or intense shades, color migration/color transfer may occur. Dark and intense colors tend to show color abrasion. Pilling is unavoidable and can also occur due to the adhesion of foreign fibers. Every flat fabric will develop a nap over time. Snags are expected if the fabric is caught on sharp objects or Velcro fasteners. A slight stripe effect may occur due to the material characteristics. Minor color and structural deviations between production batches are unavoidable and may occur. A certain degree of fading due to exposure to light or abrasion is inherent to the nature of the fabric. Thickened threads, knots, and foreign inclusions cannot be completely ruled out in woven fabrics.

CLEANING INSTRUCTIONS

Daily care and at-home cleaners can keep your fabric looking beautiful for years. In the case of a spill, stain, or general wear and tear, follow our tips on how to clean a fabric.



For cleaning you need distilled water and a ph neutral shampoo.




You need a white, clean and soft cotton cloth. Use this to remove the stain in circular motions and allow the area to dry.



Cleaning only with the vacuum cleaner nozzle.

Recommended care labeling:

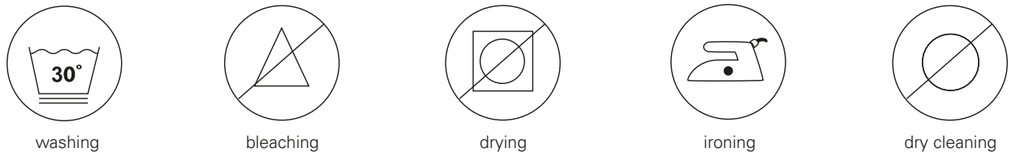

washing | bleaching | drying | ironing | dry cleaning

Note on Washability

Tests were carried out on samples in accordance with EN ISO 105-C06. Washing was done in a washing machine, without detergent, followed by air drying.

According to the standard:
"From the first wash onwards, color changes of up to grade 2 (grey scale) and size changes of ±3% in length and width (warp/weft) may occur. These values apply for up to five washing cycles."

Additional washing cycles may further affect the appearance and dimensional stability of the upholstery fabric beyond these ranges.

Finishes (for example Easy-Clean finishes or similar treatments) can be affected by washing processes. The function of such finishes generally applies only to the unwashed condition.

General Note

Tests were carried out on different samples in new, unused, and unwashed condition. The results should therefore be understood as average guideline values and do not guarantee identical values during actual use.





Instructions for use and care:

We assume no warranty for damage caused by improper use, cleaning, care, subsequent impregnation and pets.

Cleaning instruction:

Important information and useful tips for optimum cleaning and care of your upholstery fabric can be found at www.2-clean.de. Further cleaning will have to be done by professionals who specialize in how to clean with this description.

Proved by:

supporting member since 2011

ChemVerbotsV
BedGgstV